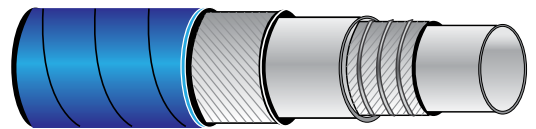










## DAIRYOIL SD DAIRY & FATTY FOODS SUCTION/DELIVERY

-  **APPLICATION** Hardwall hose suitable for suction and discharge and filling of fatty goods, animal and vegetable oils and fats, as well as food and drinks in the milk and dairy industry. Approval BfR XXI:2002 (Kat.2) FDA (CFR 21 177.2600).
-  **MATERIAL** **Tube** – NBR, white, smooth, food quality, grease and oil resistant.  
**Cover** – NVC blue, smooth wrapped nish resistant to abrasion and weathering.  
**Reinforcement** – Textile wrapped, zinc plated steel wire helix. (Plastic Helix also available).
-  **COLOUR** Blue
-  **TEMPERATURE** – 35°C to + 80°C  
Steam Cleaning up to Max 130 °C Unpressurised



PART NO.								
	I.D	O.D	VACUUM	REEL	W.P	B.P	BEND	WEIGHT
	MM	MM	BAR	LENGTH (M)	BAR	BAR	MM	KG/M
DOIL-SD-25-40	25	37	0.9	40	10	30	85	1
DOIL-SD-32-40	32	44	0.9	40	10	30	105	1.25
DOIL-SD-38-40	38	51	0.9	40	10	30	120	1.45
DOIL-SD-40-40	40	54	0.9	40	10	30	140	1.7
DOIL-SD-50-40	50	61	0.9	40	10	30	160	2
DOIL-SD-60-40	50.8	62	0.9	40	10	30	160	1.75
DOIL-SD-53-40	53	64	0.9	40	10	30	160	1.8
DOIL-SD-64-40	63.5	76.5	0.9	40	10	30	170	1.9
DOIL-SD-65-40	65	79	0.9	40	10	30	210	2.35
DOIL-SD-75-40	75	90	0.9	40	10	30	210	2.55
DOIL-SD-76-40	76.2	90.2	0.9	40	10	30	250	3.2
DOIL-SD-80-40	80	96	0.9	40	10	30	250	3.3
DOIL-SD-102-40	102	122	0.9	40	10	30	260	3.65

SAFETY FACTOR 3:15: 1  
NOT SUITABLE FOR DRY CONVEYANCE