



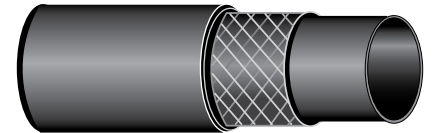







## HEATER





-  APPLICATION Water hose for automobiles. Not suitable for petroleum based liquids. Exceeds SAE J2 or 3 Type EC Class D-1 and D-2.
-  MATERIAL **Tube** – ECD EPDM rubber.  
**Reinforcement** – Rayon Fibre Spiral.  
**Cover** – Heat and Ozone resistant EPDM
-  COLOUR Black
-  TEMPERATURE – 40°C to +125°C










<b>PART NO.</b>	 <b>I.D</b>	 <b>O.D</b>	 <b>REEL</b>	 <b>W.P</b>	 <b>B.P</b>
	MM	MM	LENGTH (M)	BAR	BAR
M8-50	8	10.5	40	4.3	17.2
M10-50	10	17.29	50	4.3	17.2
M13-50	12.7	20.19	50	4.3	17.2
M15-50	15.0	22.32	50	4.3	17.2
M16-50	15.9	23.91	40	4.3	17.2

SAFETY FACTOR 3:1

## GLOWFLEX FIREFIGHTING

-  APPLICATION A robust and flexible softwall reel booster hose fitted on fire fighting trucks for the delivery of water and extinguishing fluids. The luminescent rubber cover allows safe use even in low visibility conditions.
-  MATERIAL **Tube** – Black, smooth, EPDM rubber, resistant to chemical products and fire extinguishing foams.  
**Cover** – Light yellow, luminescent, smooth, (wrapped finish) synthetic rubber, weather resistant.  
**Reinforcement** – High strength synthetic cord.
-  COLOUR Light yellow
-  TEMPERATURE – 40°C to + 100°C



<b>PART NO.</b>	 <b>I.D</b>	 <b>O.D</b>	 <b>REEL</b>	 <b>W.P</b>	 <b>B.P</b>	 <b>WEIGHT</b>
	MM	MM	LENGTH (M)	BAR	BAR	KG/M
GLOW-19-40	19	32.5	120	40	120	0.65
GLOW-25-40	25	38.5	120	40	120	0.8
GLOW-33-40	33	45.5	120	40	120	0.9

SAFETY FACTOR 3:1