






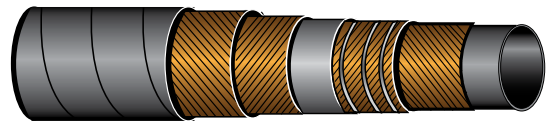

## FUEL SUCTION & OIL DELIVERY

- ⚙️
**APPLICATION** Hardwall hose used for the suction and delivery of unleaded gasoline and fuels with aromatic content of up to 50%. Suitable for use on tanker trucks.
- 📄
**MATERIAL**
  - Inner Tube** – Smooth NBR1 antistatic rubber.
  - Cover** – Smooth wrapped finish, antistatic, synthetic rubber, weathering, abrasion ozone and oil resistant.
  - Reinforcement** – High strength synthetic cord with steel helix wire.
  - Electrical Resistance** – OHM/T Electrically conductive hose,  $R < 1 \times 10^6$  OHM/lgh for lengths equal or lower than 40m. The hose can be used in atex areas.
- 💧
**COLOUR** Black
- 🌡️
**TEMPERATURE** – 30°C to + 90°C, with peaks 110°C  
Minimum operating temperature –40°C



PART NO.	 I.D	 O.D	 VACUUM	 REEL	 W.P	 B.P
	MM	MM	BAR	LENGTH (M)	BAR	BAR
PETOILSD-19-120	19	32	0.9	120	16	64
PETOILSD-25-120	25	38	0.9	120	16	64
PETOILSD-32-120	32	45	0.9	120	16	64
PETOILSD-38-120	38	52	0.9	120	16	64
PETOILSD-50-120	50	65.5	0.9	120	16	64
PETOILSD-63-120	63.5	78.5	0.9	120	16	64
PETOILSD-75-120	75	90	0.9	120	16	64
PETOILSD-100-120	100	116	0.9	120	16	64

SAFETY FACTOR 4:1