


OIL LIGHT SD LIGHT OIL SUCTION & DELIVERY

APPLICATION Lightweight and flexible hose for oil suction, corrugated with a flame proof cover. Suitable for use with oil with aromatic content of 30% (except oil with ester base). Meets UNI EN ISO 5771:2008.

MATERIAL
Tube – Black, smooth, NBR rubber.
Cover – Black, corrugated (wrapped finish), CR rubber, flame retardant according to ASTM C 542, abrasion and weathering resistant.
Reinforcement – High strength synthetic cord plus steel helix wire.

COLOUR Black

TEMPERATURE – 30°C to +125°C

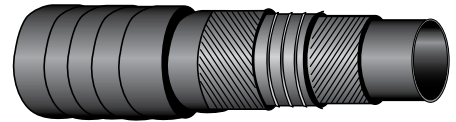

PART NO.	I.D	VACUUM	REEL	W.P	B.P	BEND	WEIGHT
	MM	BAR	LENGTH (M)	BAR	BAR	MM	KG/M
OILIGHT-SD-19-60	19	0.5	60	5	15	50	0.4
OILIGHT-SD-25-60	25	0.5	60	5	15	65	0.5
OILIGHT-SD-32-60	32	0.5	60	5	15	85	0.61
OILIGHT-SD-38-60	38	0.5	60	5	15	105	0.69
OILIGHT-SD-51-60	51	0.5	60	5	15	150	1.01
OILIGHT-SD-63-60	63	0.5	60	5	15	185	1.23
OILIGHT-SD-76-60	76	0.5	60	5	15	240	1.68
OILIGHT-SD-102-60	102	0.5	60	5	15	345	2.51

SAFETY FACTOR 3:1