











LPG DELIVERY HOSE



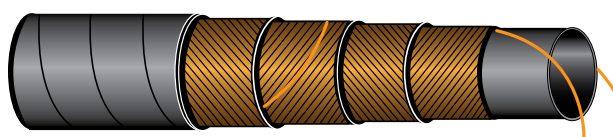

-  **APPLICATION** Softwall hose suitable for delivery of liquefied petroleum gas and natural gas. Meets AS1869:2012/H.
-  **MATERIAL**
 - Tube** – Extruded black smooth synthetic rubber.
 - Cover** – Black, smooth (wrapped finish), synthetic rubber, weathering.
 - Reinforcement** – High strength synthetic yarn.
 - Electrical Resistance** – Electrical resistance <math>< 1 \times 10</math> on service lengths assured through copper wires.
-  **COLOUR** Black
-  **TEMPERATURE** – 50°C to + 65°C









PART NO.	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	BAR	BAR
AIVG-L019-60	19	32	60	25	100
AIVG-L025-60	25	38	60	25	100
AIVG-L032-60	32	46	60	25	100
AIVG-L050-60	50.8	67	60	25	100

SAFETY FACTOR 4:1

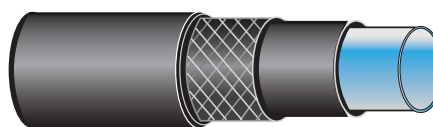V-FLEX LPG DISPENSER HOSE

-  **APPLICATION** High performance low extractable veneer layered LPG dispenser hose. Meets AS1869:2012/C.
-  **MATERIAL**
 - Tube** – Synthetic rubber.
 - Cover** – Synthetic rubber.
 - Reinforcement** – Two textile braid.
 - Lining** – Nylon Resin.
-  **COLOUR** Black
-  **TEMPERATURE** – 20°C to + 65°C



PART NO.	 I.D	 O.D	 REEL	 W.P	 B.P
	MM	MM	LENGTH (M)	BAR	BAR
V-FLEX	12.5	24	50	26	104

SAFETY FACTOR 4:1