


THERMOFLEX LPG SERVICE LINE

APPLICATION High performance low extractable thermoplastic. Service and fill lines for automobiles.
Meets performance requirements of AS1869:2012 Class G. AGA No. 7656.

MATERIAL **Tube** – Thermoplastic flexible special polyamide elastomer.
Cover – Micro perforated self-extinguishing polyurethane.
Reinforcement – Braid-polyester fibre.

COLOUR Black

TEMPERATURE – 20°C to 125°C

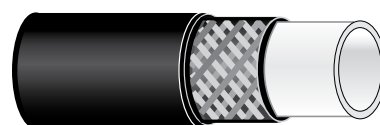

PART NO.	I.D	O.D	REEL	W.P	B.P
	MM	MM	LENGTH (M)	BAR	BAR
THERMO- 6G	6.4	12.8	100	26	120

SAFETY FACTOR 4:1


VEX LPG SERVICE & FILL LINE

APPLICATION High performance low extractable veneer layed service and fill lines for automobiles.
Meets AS1869:2012 Class G. AGA No7435.

MATERIAL **Tube** – Synthetic rubber.
Cover – Textile braid.
Reinforcement – Stainless steel wire braid.
Lining – Nylon Resin.

COLOUR Black

TEMPERATURE – 20°C to + 125°C

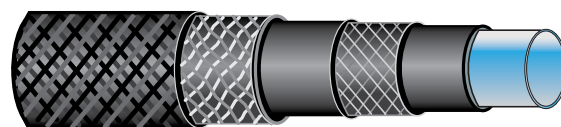

PART NO.	I.D	O.D	REEL	W.P	B.P
	MM	MM	LENGTH (M)	BAR	BAR
VEX-8-100	8	17.1	30-100	26	104
VEX-10-100	10	19.5	30-100	26	104

SAFETY FACTOR 4:1