


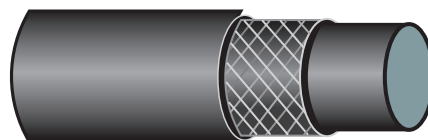
# LPG DISCHARGE HOSE






 **APPLICATION** Designed to be used for LPG Discharge in home burners, grills, heaters, and other gas appliances. Not to be used for Natural Gas in a confined area.

 **MATERIAL** **Inner Tube** – Synthetic NBR Rubber, LP Gas, oil and low temperature resistant.  
**Reinforcement** – One textile Braid.  
**Cover** – Synthetic Rubber.

 **COLOUR** Black

 **TEMPERATURE** – 20°C to + 65°C



| <b>PART NO.</b> |  <b>I.D</b> |  <b>O.D</b> | <b>BRAID</b> |  <b>W.P</b> |  <b>B.P</b> |  <b>REEL</b> |
|-----------------|--|--|--------------|---|--|---|
|                 | MM   | MM   |              | PSI   | PSI  | MTR   |
| ULH 0201        | 6.3  | 13.5   | 1            | 350   | 1750   | 100   |
| ULH 0251        | 7.9  | 16.0   | 1            | 350   | 1750   | 100   |
| ULH 0301        | 9.5  | 18.0   | 1            | 350   | 1750   | 100   |

## CONFORMANCE TO:

UL21, UL569

UL FILE NO MH13800/MH13799

SAFETY FACTOR 5.1