

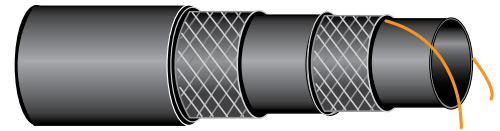
## PETROKING PETROL PUMP YARN






**APPLICATION** Dispensing commercial unleaded and diesel fuel, from vehicle and marine service station pumps.  
Meets: ASNZ2683:2000.

**MATERIAL** **Tube** – Oil resistant synthetic rubber.  
**Cover** – Oil and weather resistant synthetic rubber.  
**Reinforcement** – High tensile synthetic textile with static conductor wire.

**COLOUR** Black

**TEMPERATURE** – 40°C to + 60°C



<b>PART NO.</b>	 <b>I.D</b>	 <b>O.D</b>	 <b>REEL</b>	 <b>W.P</b>	 <b>B.P</b>
	MM	MM	LENGTH (M)	BAR	BAR
GPO502	15.9	26	50	20	60

SAFETY FACTOR 3:1

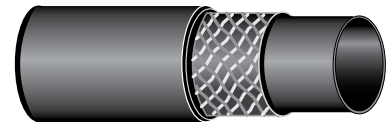
## PETROKING PETROL PUMP STEEL






**APPLICATION** Dispensing commercial unleaded and diesel fuel, from vehicle and marine service station pumps.  
Meets: ASNZ2683:2000.

**MATERIAL** **Tube** – Oil resistant synthetic rubber.  
**Cover** – Oil and weather resistant synthetic rubber.  
**Reinforcement** – Braided high tensile hose wire.

**COLOUR** Black

**TEMPERATURE** – 40°C to + 60°C



<b>PART NO.</b>	 <b>I.D</b>	 <b>O.D</b>	 <b>REEL</b>	 <b>W.P</b>	 <b>B.P</b>
	MM	MM	LENGTH (M)	BAR	BAR
GPO601	19.1	27.8	50	20	60
GPO1001	25.4	35.6	50	20	60

SAFETY FACTOR 3:1