


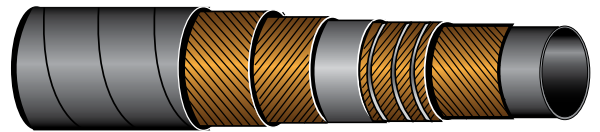
## WATER SUCTION & DISCHARGE









 **APPLICATION** Hardwall hose for suction and discharge of water and other non-corrosive fluids. Suitable for agricultural, industrial and other applications.

 **MATERIAL**  
**Inner Tube** – Black smooth synthetic rubber.  
**Reinforcement** – High strength synthetic cord with helix wire.  
**Cover** – Smooth black wrapped finish weathering and ozone resistant.

 **COLOUR** Black

 **TEMPERATURE** – 30°C to + 70°C



<b>PART NO.</b>	 <b>I.D</b>	 <b>O.D</b>	 <b>VACUUM</b>	 <b>REEL</b>	 <b>W.P</b>	 <b>B.P</b>	 <b>BEND</b>	 <b>WEIGHT</b>
	MM	MM	BAR	LENGTH (M)	BAR	BAR	MM	KG/M
WSD-R-25-120	25	33	0.9	120	10	30	125	0.5
WSD-R-30-120	30	38	0.9	120	10	30	150	0.58
WSD-R-32-120	32	40	0.9	120	10	30	160	0.63
WSD-R-38-120	38	47.5	0.9	120	10	30	190	0.83
WSD-R-40-120	40	49.5	0.9	120	10	30	200	1.12
WSD-R-51-120	51	60.5	0.9	120	10	30	255	0.86
WSD-R-63-120	63.5	75	0.9	120	10	30	380	1.8
WSD-R-76-120	76	87	0.9	120	10	30	455	2.06
WSD-R-80-120	80	91.5	0.9	120	10	30	480	2.27
WSD-R-90-120	90	103	0.9	120	10	30	540	3.5
WSD-R-102-120	102	114	0.9	120	10	30	610	3.22
WSD-R-120-60	120	136	0.9	60	10	30	660	4.99
WSD-R-127-60	127	143	0.9	60	10	30	700	5.15
WSD-R-152-60	152	170.5	0.9	60	10	30	1000	7.27
WSD-R-203-60	203	225	0.9	60	10	30	1400	12.08