


## TOTALFOOD C TOTAL FOOD CORRUGATED SUCTION & DELIVERY

**APPLICATION** Corrugated hardwall hose for suction and delivery of a wide range of food products including olive oil, milk, dairy, fruit juice, fatty foods, beer, wine and alcohol up to 96 deg.  
**Standards Met** – Reg. EC 1935/4 and CE 2023/06. Phthalates free. PAHs free (according to ZEK 01.4-08 cat. 1) Bisphenol A free. Heavy Metal tested. FDA 21 ART. 177.2600 aqueous and fatty foods. 3-A Sanitary Standards no. 1803 Class 2 foods. D.M 21/03/73 aqueous fatty foods and alcohol up to 96.

**MATERIAL** **Tube** – White, smooth, food quality taste free and odourless synthetic rubber. 100% Phthalates free.  
**Cover** – Blue, corrugated (wrapped finish) synthetic rubber, weathering and ozone resistant.  
**Reinforcement** – High strength synthetic cord and embedded helix wire.

**COLOUR** Blue

**TEMPERATURE** – 40°C to + 120°C

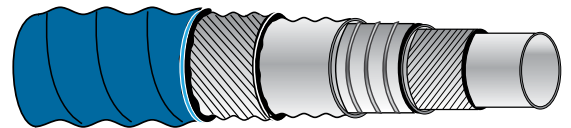

PART NO.	I.D	REEL	W.P	B.P	WEIGHT	BEND	VACUUM
	MM	LENGTH (M)	BAR	BAR	KG/M	MM	BAR
TOTAL-C-SD-25-60	25	60	10	30	0.66	75	0.6
TOTAL-C-SD-32-60	32	60	10	30	0.86	95	0.6
TOTAL-C-SD-38-60	38	60	10	30	1.06	115	0.6
TOTAL-C-SD-40-60	40	60	10	30	1.18	120	0.6
TOTAL-C-SD-50-60	50	60	10	30	1.44	150	0.6
TOTAL-C-SD-60-60	60	60	10	30	1.7	180	0.6
TOTAL-C-SD-63-60	63.5	60	10	30	1.78	195	0.6
TOTAL-C-SD-76-60	76	60	10	30	2.21	225	0.6
TOTAL-C-SD-80-60	80	60	10	30	2.42	240	0.6
TOTAL-C-SD-100-60	100	60	10	30	2.97	350	0.6